




HTC-T68G1850D

SUPER DNR HIGH RESOLUTION DAY/NIGHT CAMERAS

- ◆ Sony 1/3" Super HAD High Sensitivity Color CCD
- ◆ Ultra Low Light 0.001 Lux
- ◆ High Resolution 600 TVL Color
- ◆ Privacy Masking for up to 8 areas
- ◆ Digital Image Stabilizer reduces vibration
- ◆ Electronic Shutter up to 1/120,000
- ◆ Built in Motion Detection (8 Zone)
- ◆ Supports Pelco-D protocol via RS-485

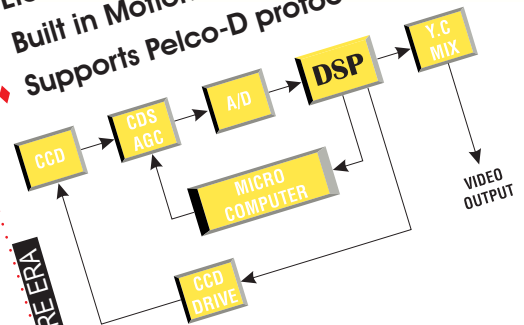

BUILDING A NEW SECURE ERA

Model Number	Day/ Night	IR LED	Push Filter	Color	Dual Voltage	Sensitivity	Resistance
HTC-T68G1850D	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	Vandal

SPECIFICATIONS

ITEM NO	HTC-T68G1850D
PICK UP DEVICE	1/3" Sony Super HAD CCD
PIXEL (TOTAL)	811H x 508V
PIXEL (EFFECTIVE)	768H x 494V
OPTICS	18~50mm
DIGITAL ZOOM	ON / OFF (10x)
H. SYNC FREQUENCY	NTCS/EIA 15.734KHz PAL/CCIR 15.626KHz
V. FREQUENCY	NTSC/EIA 60Hz PAL/CCIR 50Hz
SYNCHRONIZATION	Internal / DC type Line-lock / AC type
SCANNING SYSTEMS	2:1 Interlace
H. RESOLUTION TV-LINE	600 TVL
SENSITIVITY	0.001 Lux
BRIGHTNESS (SENS-UP)	AUTO / OFF (Adjust. x2 ~ x256)
DAY / NIGHT	Color / B/W / HLC
B. LIGHT COMPENSATION	OFF / BLC / HLC
AUTO GAIN CONTROL	LOW / HIGH / OFF
ELECTRONIC SHUTTER	1/60 ~ 1/120,000 sec
WHITE BALANCE	ATW / AWC / Manual / Outdoor / Indoor
MOTION DETECTION	ON / OFF (8 Zone, ALARM Output)
DNR	ON / OFF (1~32 Level)
PRIVACY	ON / OFF (8 Zone)
V-REV	ON / OFF
H-REV	ON / OFF
FREEZE	ON / OFF
SHARPNESS	ON / OFF (Adjustable)
DIGITAL IMAGE STABILIZER	ON / OFF
COMMUNICATION	RS-485
COMM. PROTOCOL	Pelco-D
POWER CONSUMPTION	450mA 12VDC
POWER CONSUMPTION	300mA 24VAC
S/N RATIO	52 dB (AGC OFF, Weight ON)
VANDAL RESISTANT	VANDAL DOME
WEATHER PROOF	IP 66
VIDEO-OUTPUT	1 Vp-p, 75 Ohms Composite
POWER SUPPLY	12 VDC / 24 VAC (Optional)
DIMENSIONS (mm)	143Ø x (H)119
WEIGHT (g)	1,100
STORATE TEMPERATURE	-20 C to +60 C
OPERATING TEMPERATURE	-10 C to +50 C