



HTC-T68G



HTC-T16G36



HTC-T16G28D




HTC-T68G28D



HTC-T6AH28D

SUPER DNR HIGH RESOLUTION DAY/NIGHT CAMERAS

- ◆ Sony 1/3" Super HAD High Sensitivity Color CCD
- ◆ Ultra Low Light 0.001 Lux
- ◆ High Resolution 600 TVL Color
- ◆ Privacy Masking for up to 8 areas
- ◆ Digital Image Stabilizer reduces vibration
- ◆ Electronic Shutter up to 1/120,000
- ◆ Built in Motion Detection (8 Zone)
- ◆ Supports Pelco-D protocol via RS-485

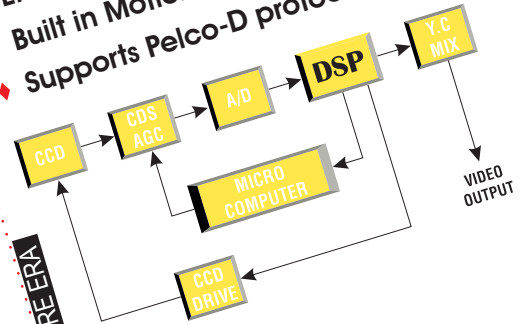

BUILDING A NEW SECURE ERA



Model Number	Day/ Night	IR LED	Push Filter	Color	Dual Voltage	Sensitivity	Resistance
HTC-T68G	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	Box Type
HTC-T16G36	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	Indoor
HTC-T16G28D	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	Indoor
HTC-T68G28D	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	Vandal
HTC-T6AH28D	Y	N/A	Y	Y	24VAC/ 12VDC	0.001 Lux	IP 66

SPECIFICATIONS

ITEM NO	HTC-T68G	HTC-T16G36	HTC-T16G28D	HTC-T68G28D	HTC-T6AH28D
PICK UP DEVICE	1/3" Sony Super HAD CCD				
PIXEL (TOTAL)	811H x 508V				
PIXEL (EFFECTIVE)	768H x 494V				
OPTICS	C or CS Mount	2.9~10mm	2.9~10mm	2.9~10mm	2.9~10mm
DIGITAL ZOOM	ON / OFF (10x)				
H. SYNC FREQUENCY	NTSC/EIA 15.734KHz PAL/CCIR 15.626KHz				
V. FREQUENCY	NTSC/EIA 60Hz PAL/CCIR 50Hz				
SYNCHRONIZATION	Internal / DC type Line-lock / AC type				
SCANNING SYSTEMS	2:1 Interlace				
H. RESOLUTION TV-LINE	600 TVL				
SENSITIVITY	0.001 Lux				
BRIGHTNESS (SENS-UP)	AUTO / OFF (Adjust. x2 ~ x256)				
DAY / NIGHT	Color / B/W / HLC				
B. LIGHT COMPENSATION	OFF / BLC / HLC				
AUTO GAIN CONTROL	LOW / HIGH / OFF				
ELECTRONIC SHUTTER	1/60 ~ 1/120,000 sec				
WHITE BALANCE	ATW / AWC / Manual / Outdoor / Indoor				
MOTION DETECTION	ON / OFF (8 Zone, ALARM Output)				
DNR	ON / OFF (1~32 Level)				
PRIVACY	ON / OFF (8 Zone)				
V-REV	ON / OFF				
H-REV	ON / OFF				
FREEZE	ON / OFF				
SHARPNESS	ON / OFF (Adjustable)				
DIGITAL IMAGE STABILIZER	ON / OFF				
COMMUNICATION	RS-485				
COMM. PROTOCOL	Pelco-D				
POWER CONSUMPTION	450mA 12VDC				
POWER CONSUMPTION	300mA 24VAC				
S/N RATIO	52 dB (AGC OFF, Weight ON)				
VANDAL RESISTANT					VANDAL DOME
WEATHER PROOF					IP 66
VIDEO-OUTPUT	1 Vp-p, 75 Ohms Composite				
POWER SUPPLY	12 VDC / 24 VAC (Optional)				
DIMENSIONS (inch)	2.76 x 2.68 x 3.95	5.11Ø x (H)4.13	5.11Ø x (H)4.13	5.62Ø x (H)4.42	3.55 x (H)5.0
WEIGHT (lbs)	0.70	0.77	0.77	2.42	2.42
STORATE TEMPERATURE	-20 C to +60 C				
OPERATING TEMPERATURE	-10 C to +50 C				