




HTP-T13MG28D

H.264 1.3 MEGAPIXEL DAY/NIGHT IP CAMERA

- ◆ 1.3MP 1/3" SONY Progressive CCD
- ◆ Multistream up to 1280x720 @ 30FPS
- ◆ Dual-codec streaming (H.264 & MJPEG)
- ◆ Vandal-Dome Camera
- ◆ Alarm Input / Relay Output (N/O)
- ◆ PoE (Power Over Ethernet) 802.3af
- ◆ 2-Way Audio
- ◆ Adjustable Video Bit Rate: 32kbps ~ 8Mbps

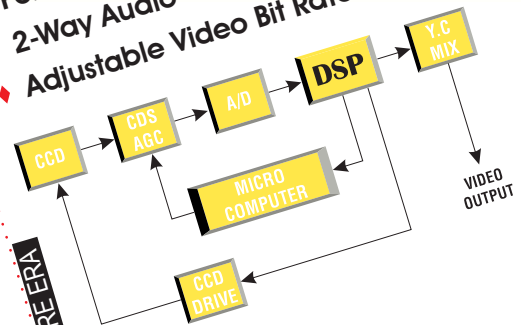

BUILDING A NEW SECURE ERA

HTP-13MG28D Specification

Section		Specification	
Network	Network Interface	Ethernet 10/100Base-T (RJ-45)	
	Network Protocol	TCP/IP, UDP, Multicast, DHCP, SMTP, HTTP, SNMP, RTP, RTSP	
Camera	Image Device	Sony 1/3", 1.3M CCD (Progressive Scan)	
	Lens	f=3.6 ~ 16mm F1.2 DC Auto Iris Lens with IR Cut Filter	
	AE Operation	Mechanical Iris lens selection, Slow Shutter on/off	
		Flickerless, Backlight Function, Brightness, Max AGC Gain	
	AWB Operation	Auto White balance control	
	MIN. Illuminance	Color : 1.5 lux, Night : 0.4lux (Slow Shutter)	
	Motion Detection	On/Off	
Video	Standards	Main Stream : H.264	
		Secondary Stream : H.264 / M-JPEG	
	Output	1 x Composite (1 Vpp 75 Ohm, BNC)	
	Resolution	1280x960/22.5fps ~ 352x240/30fps, 13 Resolution steps	
	Frame Rate	1 fps ~ 30 fps	
	Bit Rate	30Kbps ~ 8Mbps	
Audio	Algorithm	G.711u	
	Sample Rate	8KHz	
	Bit Rate	64K BPS	
	Input	1xLine-In(Mini-Stereo, Single Mono)	
	Output	1xLine-Out(Mini-Stereo, Single Mono)	
Sensor/Alarm etc	Sensor Input	1 x NO Contact	
	Alarm Output	1 x NO Contact	
	Reset Button	1 x Factory Reset Button	
Others	Dimension	100Ø for Vandal Dome, 124Ø for Bottom	
	Weight	1012g / 2.2 lbs	
	Power	DC 12V, 0.5A	PoE : 802.3af
	Power Consumption	MAX. 6W	
	Operation Temperature	-10°C ~ 50°C / 14°F ~ 122°F	

Specification & Design are subject to change without prior notice.