




HTP-T32G28DID

H.264 D1 DAY/NIGHT VANDAL-DOME IP CAMERA

- ◆ 1/3" Super SONY HAD CCD
- ◆ Multistream up to 720x480 @ 30FPS
- ◆ Dual-codec streaming (H.264 & MJPEG)
- ◆ Vandal-Dome w/ Built-In 18pc IR LED
- ◆ Alarm Input / Relay Output (N/O)
- ◆ PoE (Power Over Ethernet) 802.3af
- ◆ 2-Way Audio
- ◆ Adjustable Video Bit Rate: 32kbps ~ 8Mbps

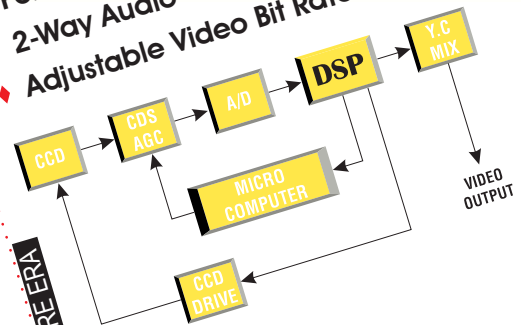

BUILDING A NEW SECURE ERA

Section		Specification	
Network	Network Interface	Ethernet 10/100Base-T (RJ-45)	
	Network Protocol	TCP/IP, UDP, Multicast, DHCP, SMTP, HTTP, SNMP, RTP, RTSP	
Camera	Image Sensor	1/3" Sony Super HAD CCD, 410,000pixels	
	Total Pixel	NTSC : 768(H) x 494(V) / PAL - 752(H) x 582 (V)	
	Lens	f=2.9~10mm, Auto Iris varifocal lens, 18pcs of IR LED, F: 1.5 IR LED Distance : About 10M	
	Max. aperture Ratio	1:1.5	
	Back Light Compensation	On/Off/Auto	
	Gain Control	AGC-L, AGC-H, OFF selectable	
	White Balance	W-ATW/S-AWC/AWC/Manual	
	Output	1 x Composite (1 Vpp 75 Ohm, BNC)	
	Electric Shutter Speed	1/60 ~ 1/200,000 sec	
	Min. Illumination	Color :0.3Lux (F1.3), 0.0Lux (IR LED On)	
	S/N Ratio	50dB (AGC Off)	
	Motion Detection	MD1 / MD2 / OFF	
	Video	Standards	Dual Streaming (H.264, H.264 / H.264, MJPEG)
Data Rate		32Kbps ~ 4Mbps	
Resolution		NTSC : 720x480, 720x240, 352x480, 352x240	
		PAL : 720x576, 720x288, 352x576, 352x288	
		540 TV Line	
Max Frame Rate		NTSC : Max 30fps / PAL : Max 25fps	
Frame Rate Range	NTSC : 0.2 ~ 30fps / PAL : 0.2 ~ 25fps		
Audio	Standards	G.711	
	Sample Rate	8KHz	
	Data Rate	64Kbps	
	Input	1 x Line-In (Mini-stereo, Single Mono)	
	Output	1 x Line-Out (Mini-stereo, Single Mono)	
Serial	Port	1 x RS-485	
	Data Rate	2,400bps ~ 115,200bps	
Sensor Alarm etc	Sensor Input	1 x NO Contact	
	Alarm Output	1 x NO Contact	
	Reset Button	1 x Factory Reset Button	
Software	True CMS/Web Viewer	Live Monitoring, Recording, Search & Playback, Backup	
Physical	Dimension	Ø100	
	Weight	1012g	
	Power Source	DC 12V/0.5A	PoE : 802.3af
	Power Consumption	Max 5W	
	Operating Temp.	-10°C ~ 50°C / 14°F ~ 122°F	