




HTP-T3700WBH

H.264 D1 DAY/NIGHT PTZ IP CAMERA

- ◆ 1/4" SONY Double Density Interline Transfer CCD
- ◆ 37x Optical, 12x Digital Zoom
- ◆ Wide Dynamic Range
- ◆ Multistream up to 780x480 @ 30FPS
- ◆ Dual-codec streaming (H.264 & MJPEG)
- ◆ Alarm Input / Relay Output (N/O)
- ◆ Web-based Viewer (Internet Explorer)
- ◆ Adjustable Video Bit Rate: 32kbps ~ 8Mbps

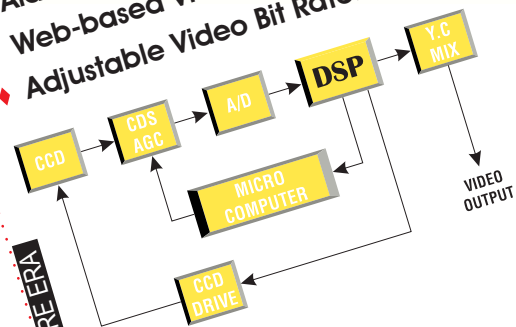

BUILDING A NEW SECURE ERA

HTP-T3700 Specification

Section		Specification	
Signal Format		NTSC	PAL
Camera	Image Device	1/4" SONY Double Density Interline Transfer CCD	
	Effective Pixel	380K Pixels [768(H) x 494(V)]	440K Pixels [752(H) x 582(V)]
	H. Resolution	550 TV Lines	680 TV Lines
	S/N Ratio	50dB (AGC Off)	
	Zoom	x37 Optical Zoom and x12 Digital Zoom	
	Focal Length	F3.5 ~ 129.5 / f=1.6 ~ 3.9mm	
	Angle of View	H: 55.5"(Wide) ~ 1.59"(Tele)mm / V: 42.5"(Wide) ~ 1.19"(Tele)mm	
	Zoom Speed	2.5 sec. (Wide to Tele)	
	MIN. Illuminance	0.7 Lux (Color) / 0.06 Lux (B/W) / 50 IRE, 1.6	
	Day & Night	Auto / Day / Night (IR Cut Filter)	
	Focus	Auto / Manual / Semi-Auto	
	Iris	Auto / Manual	
	Shutter Speed	X256 ~ 1/20000 sec	
	AGC	Low / Middle / High / Manual / Off	
	White Balance	Auto / Manual (Red & Blue Gain Adjustable)	
	BLC	WDR/ BLC/ HLC/ Off	
	Flicker-less	Selectable	
	SSNR	Low / Middle/ High / Off	
	Privacy Mark	8 Masks with Spherical Coordinates	
	Image Stabilization	On / Off	
Video	Standards	H.264 compression algorithm	
	Data Rate	32Kbps ~ 4Mbps	
	Resolution	NTSC : 720x480, 720x240, 352x480, 352x240	PAL : 720x576, 720x288, 352x576, 352x288
	Max Frame Rate	NTSC : Max 30fps / PAL : Max 25fps	
	Frame Rate Range	NTSC : 0.2 ~ 30fps / PAL : 0.2 ~ 25fps	
Network	Network Interface	Ethernet 10/100Base-T (RJ-45)	
	Network Protocol	TCP/IP, UDP, Multicast, DHCP, SMTP, HTTP, SNMP, RTP, RTSP	
Pan/Tilt	Range	Pan : 360°(Endless) / Tilt : 95°	
	Pan/Tilt Speed	Preset : 360°/ sec	
		Manual : 0.05°~ 360°/ sec (Zoom Proportional)	
		Swing : 1°~ 180°/ sec	
	Preset	128 x Presets with Labels / Independent Preset Characteristic Setup	
	Pattern	4 x Patterns (Approx. 5 Minutes for Each Pattern)	
	Swing	8 x Swings	
Group	8 x Groups (MAX. 20 Entries for Each Group)		
Other Functions	Auto Flip, Auto Parking, Power-up Action & etc.		
Software	True CMS/Web Viewer	Live Monitoring, Recording, Search & Playback, Backup	
	Communication	1 x RS-485	
	Protocol	Pelco-D, Pelco-P Selectable	
	Privacy Zone	8 x Zones	
	Sensor In/Out	Built-in 4 x Input / 2 x Output	
	OSD	English On / Off	
	Fan/Heater	Built-in	
	Power	AC Type : AC 24V / 1.5A	
		DC Type : DC 12V / 2.5A	
	Dimension	Dome : ø 149 mm / 5.9"	
		Housing : 206(ø) x 235(H) mm / 8.1" (ø) x 9.2" (H)	
Weight	Approx. 5 Kg / 11 Lbs		
Operating Temp.	-30°C ~ 50°C / -22°F ~ 122°F		

Specification & Design are subject to change without prior notice.