

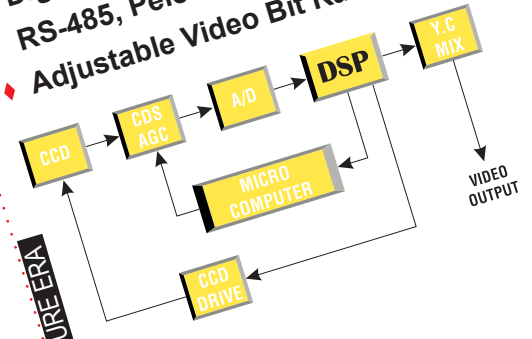


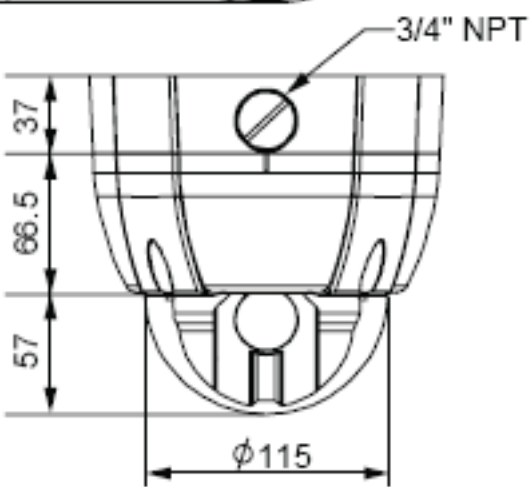


HTZ-1000IS

# HIGH PERFORMANCE SPEED DOME CAMERA

- ◆ 10X Optical, 10x Digital Zoom
- ◆ 1/4" Interline Transfer CCD
- ◆ 4 Pattern, 8 Swing & 8 Group Functions
- ◆ 128 Preset Positions
- ◆ Built-In Sensor 4 Input / 2 Output
- ◆ Digital Slow Shutter / AGC / BLC
- ◆ RS-485, Pelco-D, Pelco-P
- ◆ Adjustable Video Bit Rate: 32kbps ~ 8Mbps

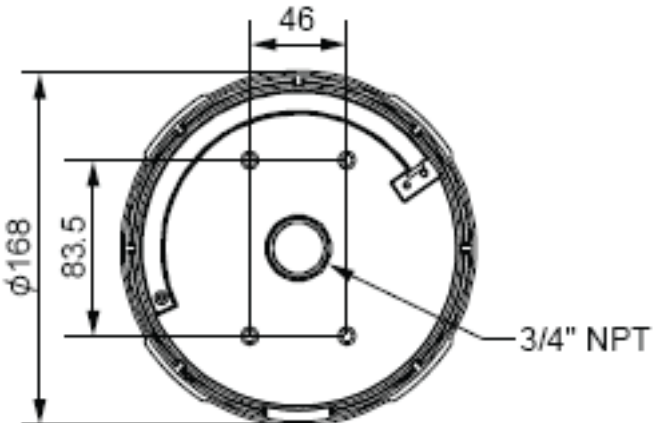


BUILDING A NEW SECURITY ERA

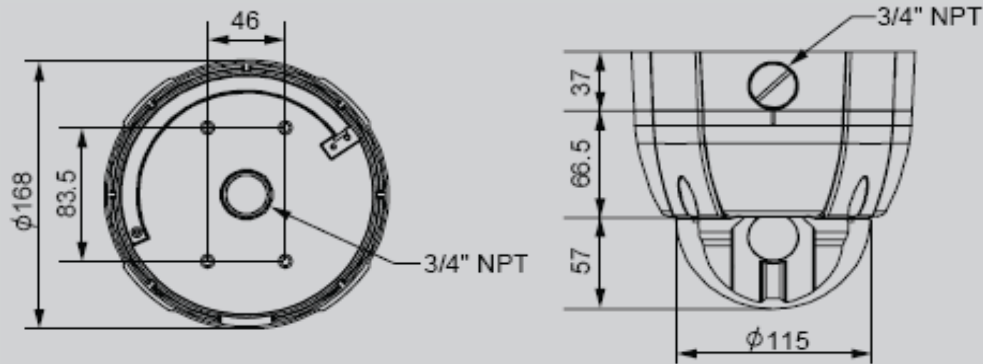

● Surface Mount



● Ceiling Mount

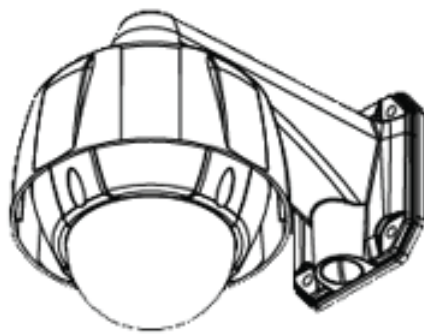

● Wall Mount

Model		×10		
Video Signal System		NTSC	PAL	
Camera	CCD	1/4" Interline Transfer CCD		
	Max. Pixels	811(H)×508(V) 410K	795(H)×596(V) 470K	
	Effective Pixels	768(H)×494(V) 380K	752(H)×582(V) 440K	
	Horizontal Res.	500 TV Line(Color), 570 TV Line(B/W)		
	S/N Ratio	50 dB (AGC Off)		
	Zoom	×10 Optical Zoom, ×10 Digital Zoom		
	Focal length	F1.8, f=3.8~38mm		
	Min. illumination	0.7 Lux (Color) / 0.02 Lux (B/W), 50 IRE		
	Day & Night	Auto / Day / Night(ICR)		
	Focus	Auto / Manual / SemiAuto		
	Iris	Auto / Manual		
	Shutter Speed	x128 ~ 1/120000 sec		
	AGC	Normal / High / Off		
	White Balance	Auto / Manual(Red, Blue Gain Adjustable)		
	BLC	Low / Middle / High / Off		
Flickerless	Selectable			
SSNR	Low / Middle / High / Off			
Pan/Tilt	Range	Pan : 360°(Endless) Tilt : 180° (Auto-Flip), 95° (Normal)		
	Pan/Tilt Speed	Preset : 360°/sec		
		Manual : 0.05 ~ 360°/sec (proportional to zoom)		
		Swing : 1~ 180°/sec		
	Preset	127 Preset (Label, Camera Image Setting)		
	Pattern	4 Pattern, 1200 commands(about 5 minute)/Pattern		
	Swing	8 Swing		
Group	8 Group (20 action entities per Group)			
Other Functions	Auto Flip, Auto Parking, Power Up Action etc.			
General	Communication	RS-485		
	Protocol	Pelco-D, Pelco-P selectable		
	Privacy Zone	4 Zone		
	Alarm Input	4 Input		
	OSD	Menu / PTZ information etc		
	Rated Power**	AC Type :	AC 24V / 1.5A (with Fan/Heater)	
			AC 24V / 0.4A (without Fan/Heater)	
	Dimension	Dome : Ø115		
		Surface Mount : Ø168 × 160.5(H) mm		
		Ceiling Mount : Ø190 × 198.5(H) mm Wall Mount : Ø190 × 263 × 297 mm		
Weight	Surface Mount : about 2.2 Kg			
	Ceiling Mount : about 3.4 Kg			
	Wall Mount : about 3.8 Kg			
Operating Temp.	-30°C ~ 50°C (with Fan/Heater)			
	0°C ~ 40°C (without Fan/Heater)			